KIT PRODUCT TECHNICAL DATASHEET

KIT R20/310




Composition KIT R20/310

CODE	DESCRIPTION	QTY
R20/300	Electromechanical actuator 230V AC, irreversible, for swing gate with leaf up to 2,5 m with 1 microswitch limit switch in opening. Complete with short brackets to weld on.	2
H70/200AC/BOX	Control unit for 2 motors 230V AC with slow-down functions, in plastic box.	1
H93/RX22A/I	Plug-in receiver fixed code 2 channels 433,92 MHz (500 storable codes) for control units series H70, B70, EDGE, CTRL and F70.	1
T80/TX2	Dual code transmitter (modality fixed code or rolling code), 433,92 MHz, 2 channels, with copy function.	2
R90/F2ES	Pair of external photocells synchronized.	1
FIFTHY/230	LED flashing light 230V - 115V with integrated antenna.	1
R99/C/001	Signboard "Automatic Opening".	1

PRODUCT TECHNICAL SPECIFICATIONS	
Power line supply	230V AC - 50Hz
Motor power supply	230V AC
Power rating	200W
Frequency of use	40%
Thrust	2500N
Operating temperature	-20+55 C°
Protection level	IP44
Reductor Type	Irreversible
Manoeuvre speed	1,66 cm/s
Opening time	19 s
Stroke	320 mm

Motor thermal protection	150 C°
Incorporated condenser	15 µF
Limit switch	Microswitch in opening (optional in closing MC770)
Encoder	-
Maximum dimension product in mm (L x W x H)	858,5 x 120 x 165
Product weight packed (Kg)	20,8
Number items per pallet/box	21


PRODUCT DIMENSIONS AND PREPARING FOR INSTALLATION

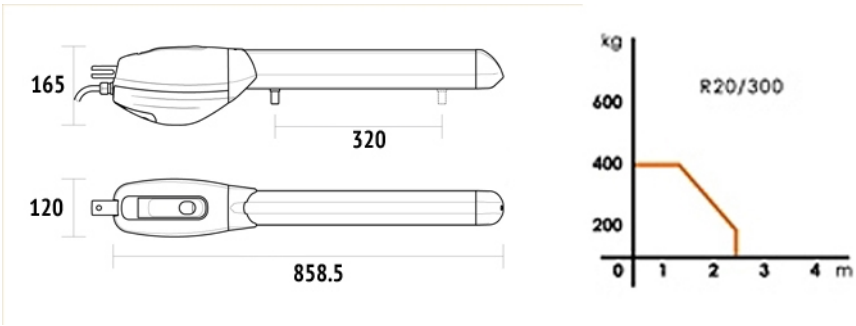


PRODUCT ACCESSORIES



MC770
Kit optional microswitch in closing with cable series R20.



MC780
Kit 2 EXTRA mechanical stops for R20 series.



KT206/R
Kit short adjustable rear bracket to screw on and short welded front bracket to screw on.