

PRODUCT TECHNICAL DATASHEET

R30/1204

Optical encoder 

Magnetic limit switch 

230V AC 




CODE	DESCRIPTION	PCS/PALLET
R30/1204	Electromechanical motor 230V AC, irreversible, ideal for sliding gates up to 1200 kg, with built-in control unit H70 and optical encoder. Complete with fixing plate with tie rods and magnetic limit switch.	44

PRODUCT TECHNICAL SPECIFICATIONS

Max gate weight	1200 kg
Power line supply	230V AC - 50Hz
Stand-by consumption	0,5W
Motor power supply	230V AC
Power	460W
Frequency of use	50%
Thrust	900N
Operating temperature	-20+55°C
Protection level	IP44
Reductor Type	Irreversible
Manoeuvre speed	9.5 m/min (0.16 m/s)
Motor thermal protection	150°C
Incorporated condenser	18 µF
Limit switch	Magnetic
Onboard control unit	H70/104AC
Encoder	Optical
Type exit gear	Z17/mod 4
Maximum dimension product in mm (L x W x H)	325 x 162 x 294


Product weight packed (Kg)	16,7
Number items per pallet/box	44

PRODUCT DIMENSIONS AND PREPARING FOR INSTALLATION

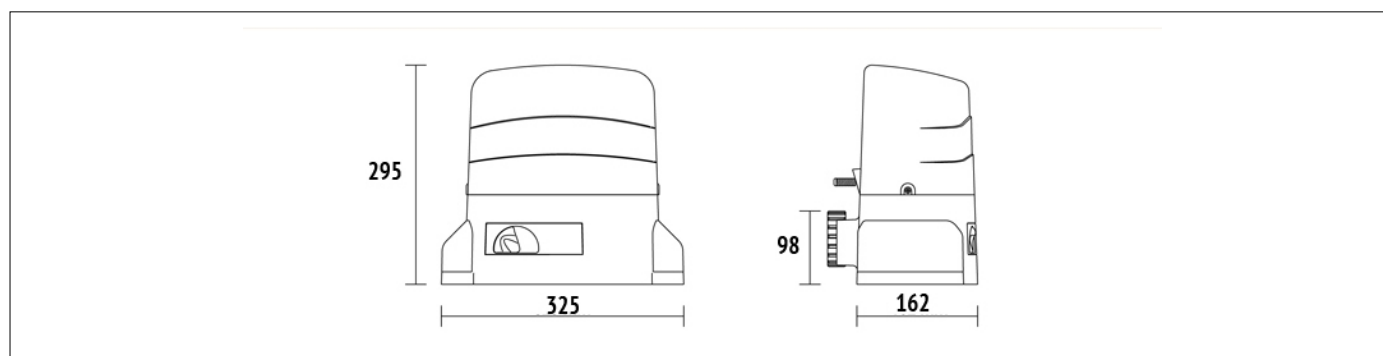


DIMENSION

PRODUCT PREPARING FOR INSTALLATION

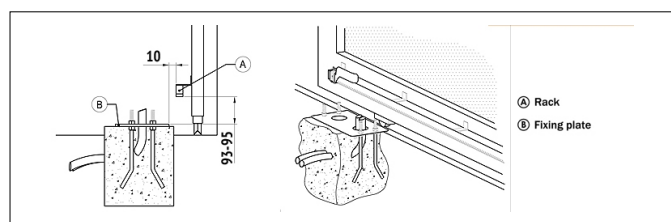

PREDISPOSITION FOR STANDARD INSTALLATION

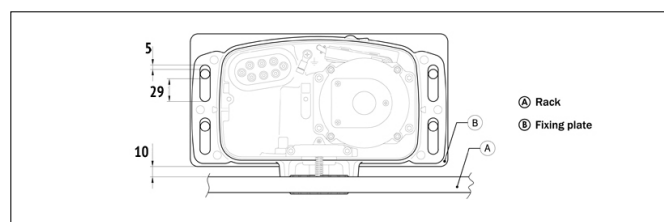

PRODUCT ACCESSORIES



KT212
Raised fixing plate for R30 series
(+3,5 cm).



GA550
Galvanised steel rack 22x22x1000,
module 4.



GA551
Galvanised steel rack 30x12x1000,
module 4, complete with spacers and
screws.



GA554
Pocket of 6 spacers (2,5 cm) with
screws.



GA557
Roger Technology nylon rack, module
4 to 6 connectors, L.1000.



LT328
Pinion Z17 mod. 4 Increased
thickness H.38 for series BG30 - G30
- TW110 - R30 - E30 (except
BG30/804/HS - BG30/1504/HS -
TW110/1000/HS).