KIT PRODUCT TECHNICAL DATASHEET

KIT R20/510




Composition KIT R20/510

CODE	DESCRIPTION	QTY
R20/500	Electromechanical actuator 230V AC, irreversible, ideal for swing gates with leaf up to 3,5 m with 1 microswitch limit switch in opening. Complete with long brackets to weld on.	2
H70/200AC/BOX	Control unit for 2 motors 230V AC with slow-down functions, in plastic box.	1
H93/RX22A/I	Plug-in receiver fixed code 2 channels 433,92 MHz (500 storable codes) for control units series H70, B70, EDGE, CTRL and F70.	1
T80/TX2	Dual code transmitter (modality fixed code or rolling code), 433,92 MHz, 2 channels, with copy function.	2
R90/F2ES	Pair of external photocells synchronized.	1
FIFTHY/230	LED flashing light 230V - 115V with integrated antenna.	1
R99/C/001	Signboard "Automatic Opening".	1

PRODUCT TECHNICAL SPECIFICATIONS	
Power line supply	230V AC - 50Hz
Motor power supply	230V AC
Power rating	200W
Frequency of use	40%
Thrust	2500 N
Operating temperature	-20+55°C
Protection level	IP44
Reductor Type	Irreversible
Manoeuvre speed	1,66 cm/s
Opening time	27 s
Stroke	520 mm


Motor thermal protection	150°C
Incorporated condenser	15 µF
Limit switch	Microswitch in opening (optional in closing MC770)
Encoder	-
Maximum dimension product in mm (L x W x H)	1088,5 x 120 x 165
Product weight packed (Kg)	23,6
Number items per pallet/box	18

PRODUCT DIMENSIONS AND PREPARING FOR INSTALLATION

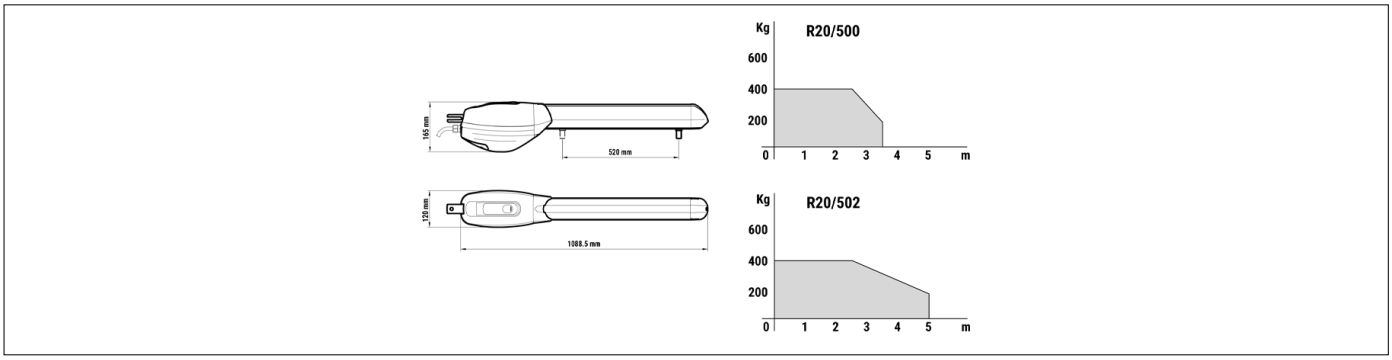

DIMENSIONS

PRODUCT PREPARING FOR INSTALLATION

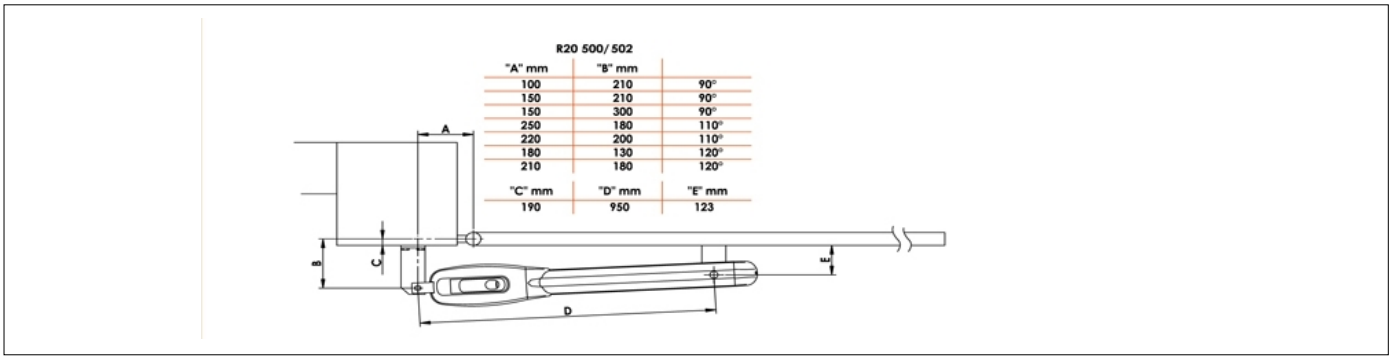


PREDISPOSITION FOR STANDARD INSTALLATION


PRODUCT ACCESSORIES



MC770
Kit optional microswitch in closing with cable series R20.



MC780
Kit 2 EXTRA mechanical stops for R20 series.



KT205/R
Kit long adjustable rear bracket to screw on and long welded front bracket to screw on.